


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R4W  
N 1/16  
SEC 8 | SEC 9  
U.S.B.&M.

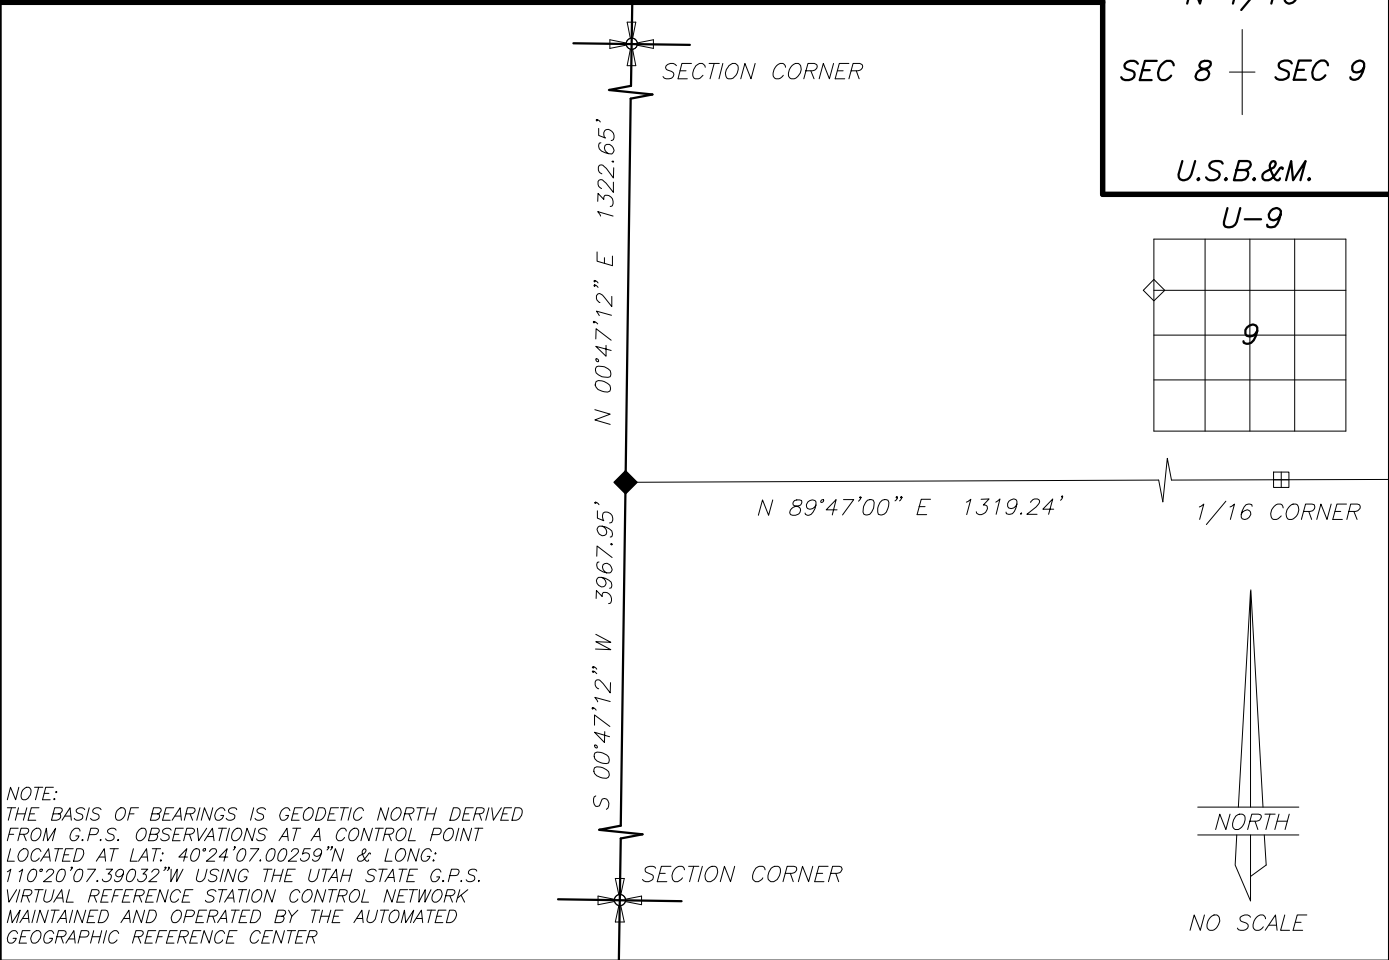

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED  
FROM G.P.S. OBSERVATIONS AT A CONTROL POINT  
LOCATED AT LAT: 40°24'07.00259"N & LONG:  
110°20'07.39032"W USING THE UTAH STATE G.P.S.  
VIRTUAL REFERENCE STATION CONTROL NETWORK  
MAINTAINED AND OPERATED BY THE AUTOMATED  
GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

POSITION OF CORNER WAS DETERMINED BY SINGLE PROPORTIONATE MEASUREMENT  
BETWEEN THE SECTION CORNERS

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE  
THE ORIGINAL LOCATION OF THE CORNER

SET 5/8" X 24" REBAR WITH ALUMINUM CAP STAMPED; PLS 148951 AT 1/16 CORNER  
REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA  
(U.S. SURVEY FEET)  
NAD 83 UTAH CENTRAL ZONE  
N: 7321212.02  
E: 1960414.26

LATITUDE: 40°24'46.68897" N  
LONGITUDE: 110°21'02.78805" W  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0040W0\_300560

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do  
hereby certify that I have performed or reviewed the work done on the  
diagrammed corner as reported on this recordation form and approve same

Date 8 FEB '16

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

